


Lightstripe LCL



- Lighting technology LED
- Function panel (single module) with recessed spotlight, gimbal-mounted
- Fitting of the function panel in the frame without the use of tools
- Floor and wall mounting not permitted
- Turning and tilting (360°/35°)
- With integral reflector SP, MFL, FL or WFL
- Supply unit included
- Connection to power supply by Wieland plug GST18i3; wire length l = 0.5 m
- Version with DALI or Casambi on request (Casambi not compatible with metal ceilings)

Colours : white, anthracite



- 100% recyclable
- Designed in accordance with the Ecodesign Directive (2019/2020/EU)
- Manufactured with 60% recycled aluminium
- Long LED life due to efficient thermal management







Photometric data

CRI Colour quality	Power level									
	19 W		23 W		27 W		31 W		35 W	
	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]
830	2532	134	2978	131	3405	126	3807	123	4196	119
840	2658	141	3127	137	3575	132	3998	129	4405	125
927	2062	109	2426	106	2774	103	3101	100	3417	97
930	2169	115	2552	112	2917	108	3433	111	3595	102
940	2279	121	2681	118	3065	114	3428	111	3778	107
Brilliant (930 = Best color/ Best White)	2077	110	2438	107	2779	103	3095	100	3397	97
N27	1536	81	1803	78	2055	76	2290	73	2517	71
NMeat	-	-	-	-	-	-	-	-	1604	44

Maximum possible, optionally available connected load: 38 W.

According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The values apply to the luminaire with MFL reflector, in the case of the SP/FL/WFL reflectors the values can

deviate +/- 5%. The photometric values are standard values and refer to the entire luminaire. Other light qualities on request to info@ansorg.com. This product contains two light sources of energy efficiency class D (830/840), E (927/930/940), F (N27) or G (NMeat).

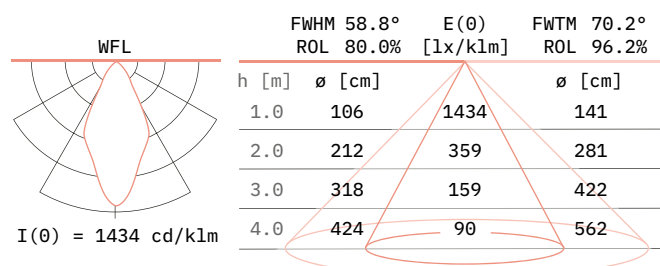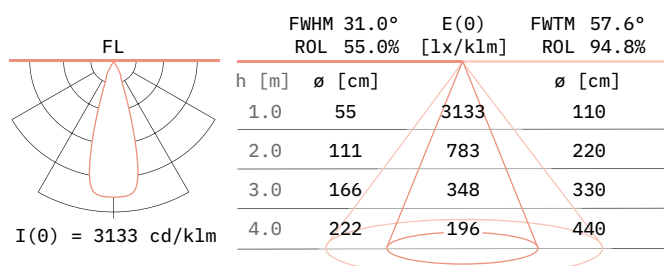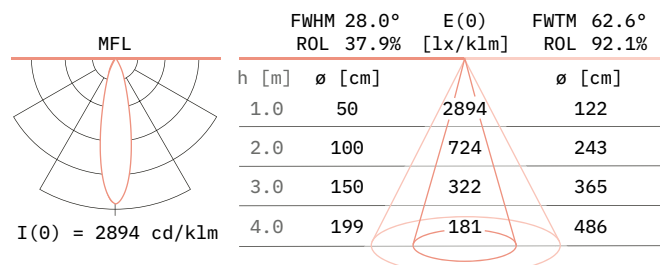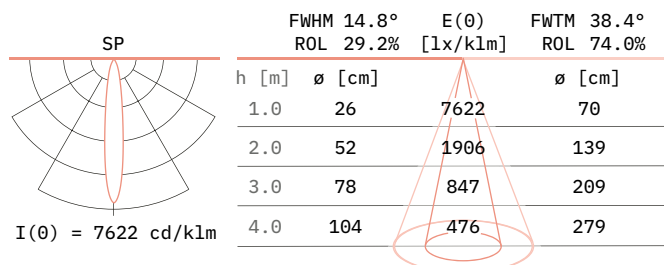

Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 1,0 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 ≥ 50,000h, Ta 25 °C
	L90/B50 ≥ 50,000h, Ta 25 °C
Failure rate	C0/B10 ≥ 50,000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	34
Protection class	1
Type of protection	IP20
Certification mark	

Accessories

Product	Option
Fitting frame	Lightstripe LLS 1-3 modules

Optional accessories

Product	Option
Blank panel	Lightstripe LLS 1-2 modules
Interchangeable reflector	SP, MFL, FL, WFL
Glasses	Safety glas
	Safety glas (anti-glare)
	Diffusing glass
	Ribbed glass (oval light image)
Filter	UV filter
	Moodfilter
Glare reduction	Honeycomb grid, black