


Lightstripe LEL single



- Lighting technology LED
- Function panel (single module) with downlight
- Fitting of the function panel in the frame without the use of tools
- Floor and wall mounting not permitted
- With integral reflector FL, WFL or VWFL
- Supply unit included
- Connection to power supply by Wieland plug GST18i3; wire length l = 0.5 m
- Version with DALI or Casambi on request (Casambi not compatible with metal ceilings)

Colours : white, anthracite



- 100% recyclable
- Designed in accordance with the Ecodesign Directive (2019/2020/EU)
- Manufactured with 50% recycled aluminium
- Long LED life due to efficient thermal management






Photometric data

CRI Colour quality	Power level									
	15 W		19 W		23 W		27 W		31 W	
	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]
830	2019	136	2466	130	2889	127	3293	122	3670	118
840	2121	142	2589	137	3032	133	3471	129	3854	124
927	1645	110	2008	106	2352	103	2681	99	2989	96
930	1730	116	2112	112	2474	109	2821	104	3145	101
940	1818	122	2220	117	2601	114	2964	110	3305	107
Brilliant (930 = Best color/ Best White)	1658	111	2022	108	2360	104	2678	100	2968	96
NMeat	-	-	957	49	-	-	-	-	1374	43

Maximum possible, optionally available connected load: 38 W.

According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The values apply to the luminaire with FL reflector, in the case of the WFL/VWFL reflectors the values can

deviate +/- 5%. The photometric values are standard values and refer to the entire luminaire. Other light qualities on request to info@ansorg.com. This product contains two light sources of energy efficiency class D (830/840), E (927/930/940) or G (NMeat).

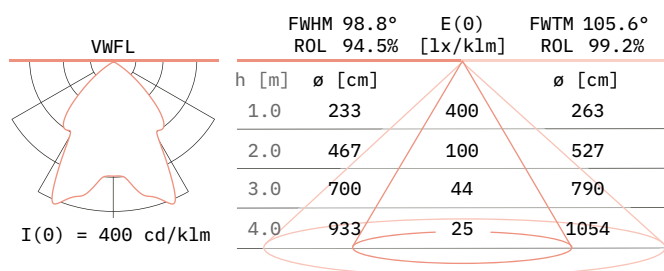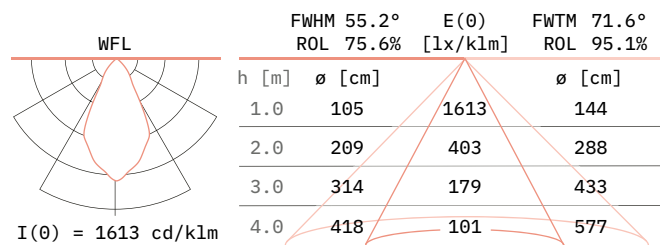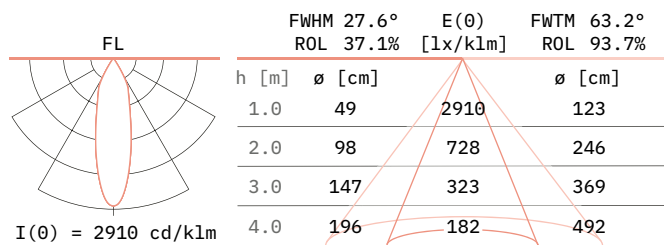

Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 0,9 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 ≥ 50,000h, Ta 25 °C
	L90/B50 ≥ 50,000h, Ta 25 °C
Failure rate	C0/B10 ≥ 50,000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	34
Protection class	1
Type of protection	IP20
Certification mark	en préparation


Accessories

Product	Option
Fitting frame	Lightstripe LLS 1-3 modules

Optional accessories


Product	Option
Blank panel	Lightstripe LLS 1-2 modules

Lightstripe LEL double

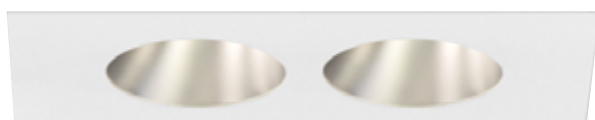

- Lighting technology LED
- Function panel (double module) with two down-light
- Fitting of the function panel in the frame without the use of tools
- Floor and wall mounting not permitted
- With integral reflector FL, WFL or VWFL
- Supply unit included
- Connection to power supply by Wieland plug GST18i3; wire length l = 0.5 m
- Version with DALI or Casambi on request (Casambi not compatible with metal ceilings)

Colours : white, anthracite

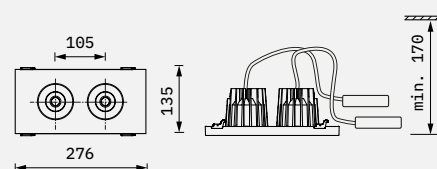

- 100% recyclable
- Designed in accordance with the Ecodesign Directive (2019/2020/EU)
- Manufactured with 50% recycled aluminium
- Long LED life due to efficient thermal management






Photometric data

CRI Colour quality	Power level									
	15 W		19 W		23 W		27 W		31 W	
	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]
830	4038	136	4932	130	5778	127	6586	122	7340	118
840	4242	142	5178	137	6064	133	6942	129	7708	124
927	3290	110	4016	106	4704	103	5362	99	5978	96
930	3460	116	4224	112	4948	109	5642	104	6290	101
940	3636	122	4440	117	5201	114	5928	110	6610	107
Brilliant (930 = Best color/ Best White)	3316	111	4044	108	4720	104	5356	100	5936	96
NMeat	-	-	957	49	-	-	-	-	2748	43

Maximum possible, optionally available connected load: 38 W.

According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The values apply to the luminaire with FL reflector, in the case of the WFL/VWFL reflectors the values can

deviate +/- 5%. The photometric values are standard values and refer to the entire luminaire. Other light qualities on request to info@ansorg.com. This product contains two light sources of energy efficiency class D (830/840), E (927/930/940) or G (NMeat).

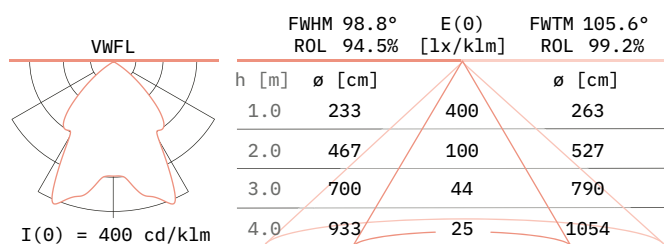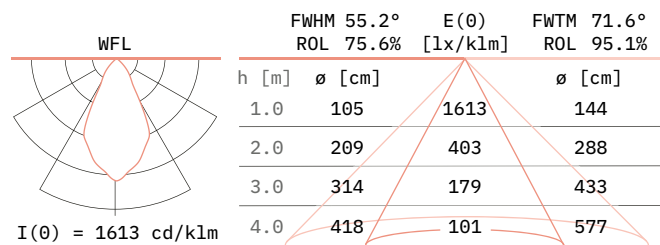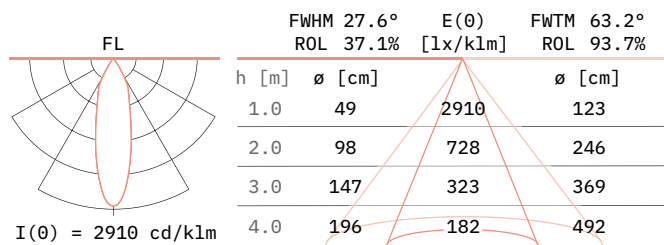

Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 1,5 kg
Colour tolerance	3SDCM (MacAdam)
Maintenance of luminous flux	L80/B10 ≥ 50,000h, Ta 25 °C
	L90/B50 ≥ 50,000h, Ta 25 °C
Failure rate	C0/B10 ≥ 50,000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	34
Protection class	1
Type of protection	IP20
Certification mark	en préparation

Accessories

Product	Option
Fitting frame	Lightstripe LLS 1-3 modules

Optional accessories

Product	Option
Blank panel	Lightstripe LLS 1-2 modules