


Punta PXR



- Lighting technology LED
- Tool-less ceiling mounting
- Ceiling cut-out Ø95 mm
- Floor and wall mounting not permitted
- Turning and tilting (355°/45°)
- With integral reflector SP, MFL or FL
- Supply unit included
- Connection to power supply by Wieland plug GST18i3; wire length l = 0.5 m
- Version with DALI or Casambi on request (Casambi not compatible with metal ceilings)

Colours: white, anthracite



- 100% recyclable
- Designed in accordance with the Ecodesign Directive (2019/2020/EU)
- Long LED life due to efficient thermal management






Photometric data

CRI Colour quality	Power level			
	11 W		16 W	
	Luminous flux luminaire [lm]	System efficiency [lm/W]	Luminous flux luminaire [lm]	System efficiency [lm/W]
830	1398	123	1783	115
840	1468	129	1873	121
927	1139	100	1452	94
930	1198	105	1528	99
940	1258	110	1605	104
Brilliant (930 = Best color/ Best White)	1111	96	1393	88

Maximum possible, optionally available connected load: 17 W.

According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The values apply to the luminaire with MFL reflector, in the case of the SP/FL reflectors the values can

deviate +/- 5%. The photometric values are standard values and refer to the entire luminaire. Other light qualities on request to info@ansorg.com. This product contains two light sources of energy efficiency class D (830/840) or E (927/930/940).

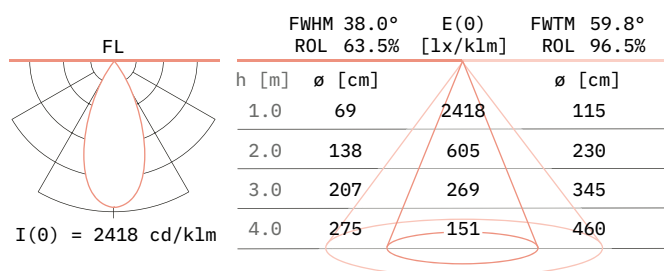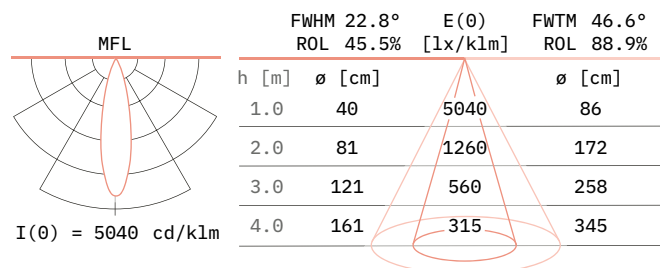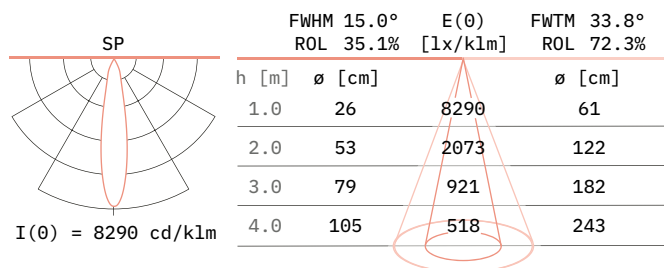

Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 0.5 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 ≥ 50,000h, Ta 25 °C
	L90/B50 ≥ 50,000h, Ta 25 °C
Failure rate	C0/B10 ≥ 50,000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker B 16A	25
Protection class	1
Type of protection	IP20
Certification mark	ENEC / CB