
Lintra LMT



- Lighting technology LED
- Linear module for three-circuit track
- Tool-less mounting with track adapter for threecircuit track (Global or Stucchi)
- Turnable (90°)
- Floor and wall mounting not permitted
- Linear optics with beam characteristic DNB, DMB or DWB
- Supply unit included
- Version with DALI on request

Colours: white, anthracite

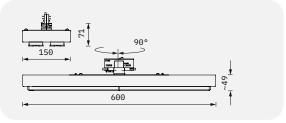

- 100% recyclable
- Designed in accordance with the Ecodesign Directive (2019/2020/EU)
- Long LED life due to efficient thermal management


Photometric data

	Power level	
	57,5 W	
CRI Colour quatity	Luminous flux [lm]	System efficiency [lm/W]
830	9758	170
835	10022	174
840	10286	179

According to IEC 62722-1 the given rated values of the total luminous flux and of the electric power must not deviate by more than 10%. The photometric values are standard values and refer to the entire luminaire. Other light qualities on request to


info@ansorg.com. This product contains light sources of energy efficiency class D (830/835/840).

Page 2/2

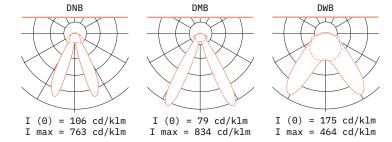


Planning information

Recommended mounting height



Distance of luminaires



Technical data

Information	Values
Connection data	220-240 V, 50/60 Hz (110-277 V on request)
Weight	approx. 2.1 kg
Colour tolerance	3SDCM (MacAdam)
Lumen maintenance	L80/B10 ≥ 50,000h, Ta 25 °C
	L90/B50 ≥ 50,000h, Ta 25 °C
Failure rate	C0/B10 ≥ 50,000h, Ta 25 °C
Photobiological safety	RG1
Number per circuit breaker	B16A = 30
Protection class	1
Type of protection	IP20
Certification mark	ENEC / CB in preparation